


- SJX 350
- SJX 468
- SJX 520



SJX
Series

SJX系列型号说明
SJX series model description

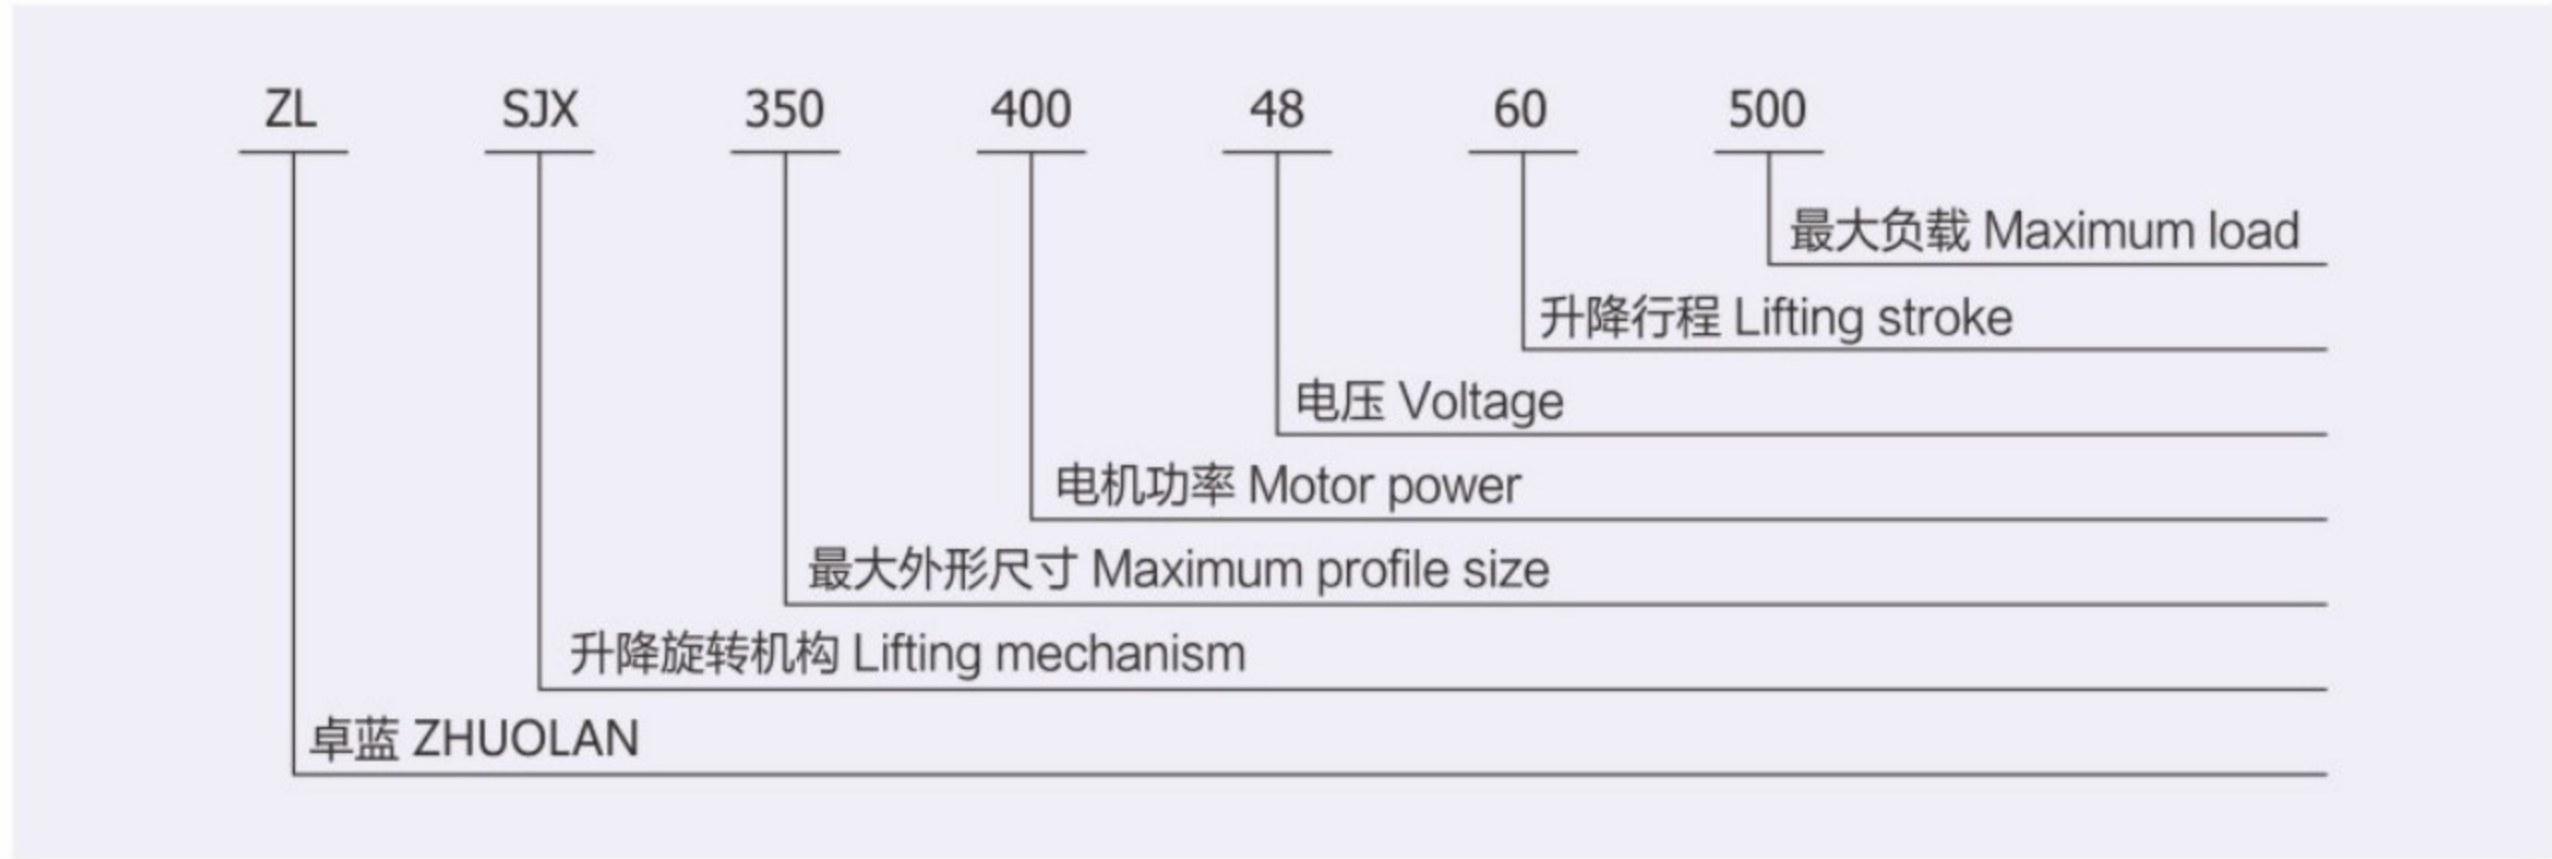

SJX 350 Series

ZL-SJX-350-400-48-60-500



升降参数
Lift parameter

类型 Type	X	行星减速机 Planetary reducer
行程 Route	mm	60
丝杆规格 Screw rod specification	mm	T32×5
减速机速比 Speed ratio of reducer	i	40
传动齿比 Gear ratio	I	1
升降速度 Up and down speed	mm/s	6.25
升降时间 Up and down time	s	9.6
限位传感器 Limit Sensor	SICK	常开NPN-24V Regular opening NPN-24V

电机参数
Motor parameters




负载 Load	Kg	500
电机功率 Motor power	W	400
电机电压 Motor voltage	V	48
电机转速 Motor speed	Rpm	3000
电机电流 Motor current	A	11.95
额定扭矩 Rated Torque	N·m	1.27
防护等级 Protection level	IP	54

旋转参数
Rotation parameter

类型 Type	X	行星减速机 Planetary reducer
减速机速比 Speed ratio of reducer	i	40
传动齿比 Gear ratio	i	6.04
旋转位移 Rotation Displacement	90/转90/rpm	1.51
旋转90° Rotate 90°	s	1.21
旋转原点 Origin of rotation	SICK	常开NPN-24V Regular opening NPN-24V

其它
Others

减速机润滑 Reducer lubrication	润滑脂 Grease	-20° ~ 200°
自重 Self weight	Kg	约 26.5

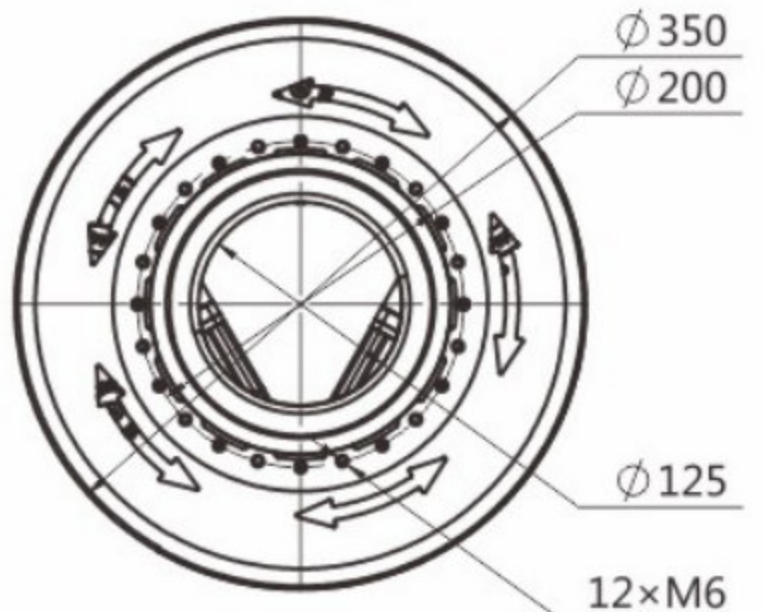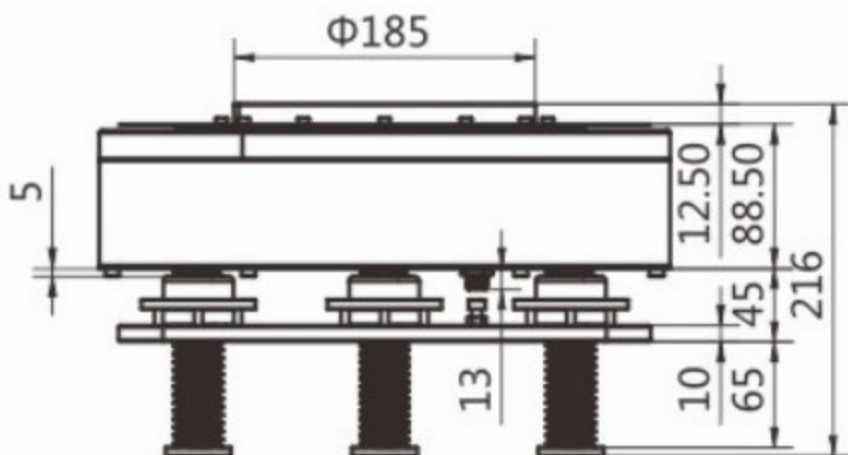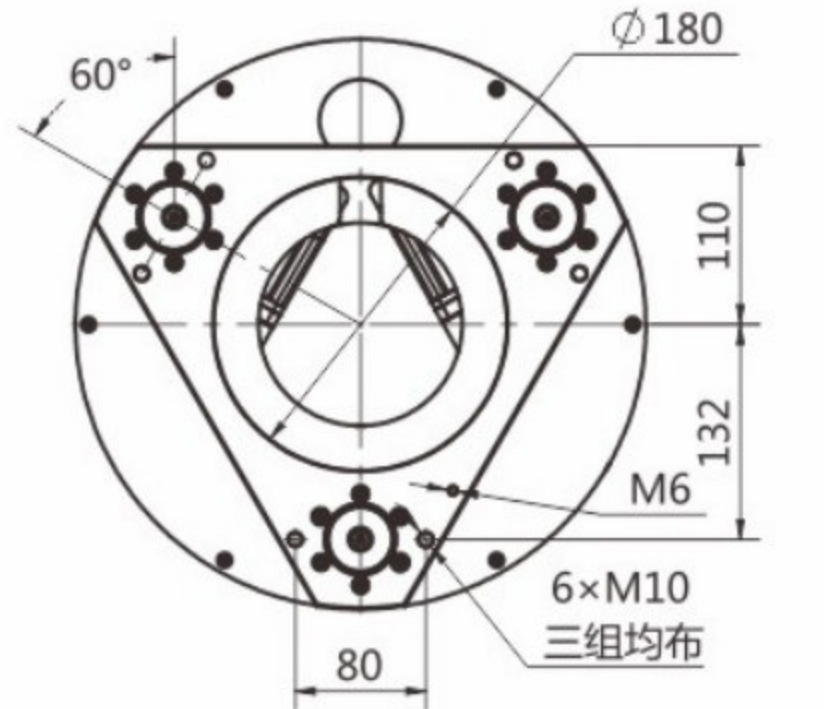

SJX 468 Serices

ZL-SJX-468-600-48-50-1000



升降参数
Lift parameter

类型 Type	X	行星减速机 Planetary reducer
行程 Route	mm	50
丝杆规格 Screw rod specification	mm	T36×6
减速机速比 Speed ratio of reducer	i	40
传动齿比 Gear ratio	I	1
升降速度 Up and down speed	mm/s	7.5
升降时间 Up and down time	s	6.67
限位传感器 Limit Sensor	SICK	常开NPN-24V Regular opening NPN-24V

电机参数
Motor parameters




负载 Load	Kg	1000
电机功率 Motor power	W	600
电机电压 Motor voltage	V	48
电机转速 Motor speed	Rpm	3000
电机电流 Motor current	A	16.5
额定扭矩 Rated Torque	N-m	1.91
防护等级 Protection level	IP	65

旋转参数
Rotation parameter

类型 Type	X	行星减速机 Planetary reducer
减速机速比 Speed ratio of reducer	i	40
传动齿比 Gear ratio	i	8.89
旋转位移 Rotation Displacement	90/转90/rpm	2.22
旋转90° Rotate 90°	s	1.8
旋转原点 Origin of rotation	SICK	常开NPN-24V Regular opening NPN-24V

其它
Others

减速机润滑 Reducer lubrication	润滑脂 Grease	-20° ~ 200°
自重 Self weight	Kg	约 50.8

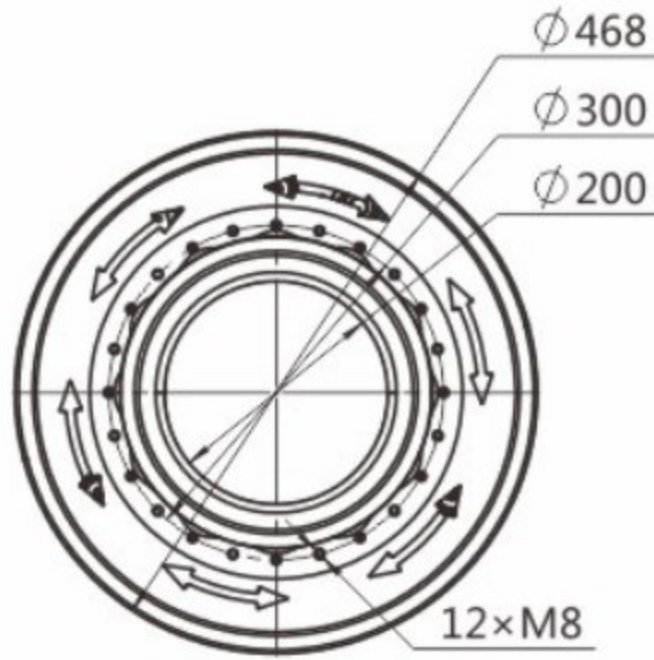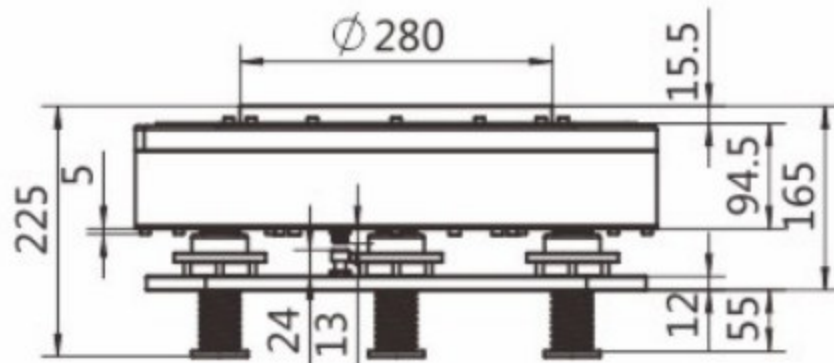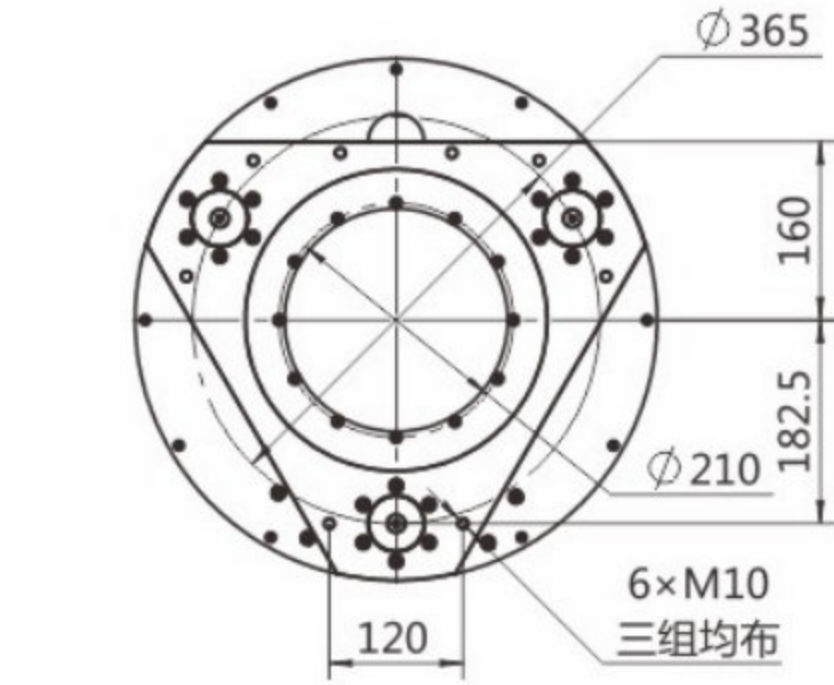

SJX 468 Serices

ZL-SJX-468-600-48-60-1000



升降参数
Lift parameter

类型 Type	X	行星减速机 Planetary reducer
行程 Route	mm	60
丝杆规格 Screw rod specification	mm	T36×6
减速机速比 Speed ratio of reducer	i	40
传动齿比 Gear ratio	I	1
升降速度 Up and down speed	mm/s	7.5
升降时间 Up and down time	s	6.67
限位传感器 Limit Sensor	SICK	常开NPN-24V Regular opening NPN-24V

电机参数
Motor parameters




负载 Load	Kg	1000
电机功率 Motor power	W	600
电机电压 Motor voltage	V	48
电机转速 Motor speed	Rpm	3000
电机电流 Motor current	A	16.5
额定扭矩 Rated Torque	N-m	1.91
防护等级 Protection level	IP	65

旋转参数
Rotation parameter

类型 Type	X	行星减速机 Planetary reducer
减速机速比 Speed ratio of reducer	i	40
传动齿比 Gear ratio	i	8.89
旋转位移 Rotation Displacement	90/转90/rpm	2.22
旋转90° Rotate 90°	s	1.78
旋转原点 Origin of rotation	SICK	常开NPN-24V Regular opening NPN-24V


其它
Others

减速机润滑 Reducer lubrication	润滑脂 Grease	-20° ~ 200°
自重 Self weight	Kg	约 50.8

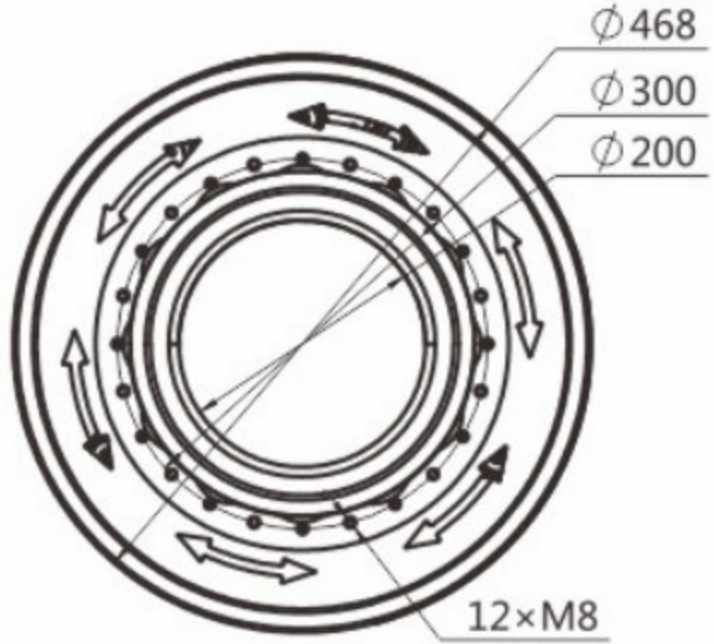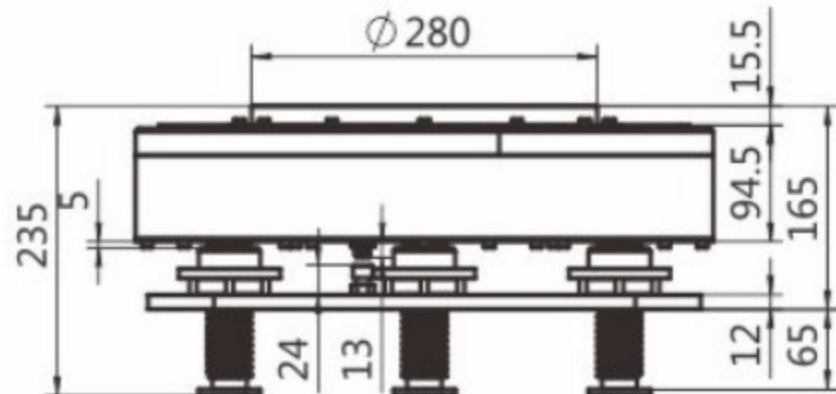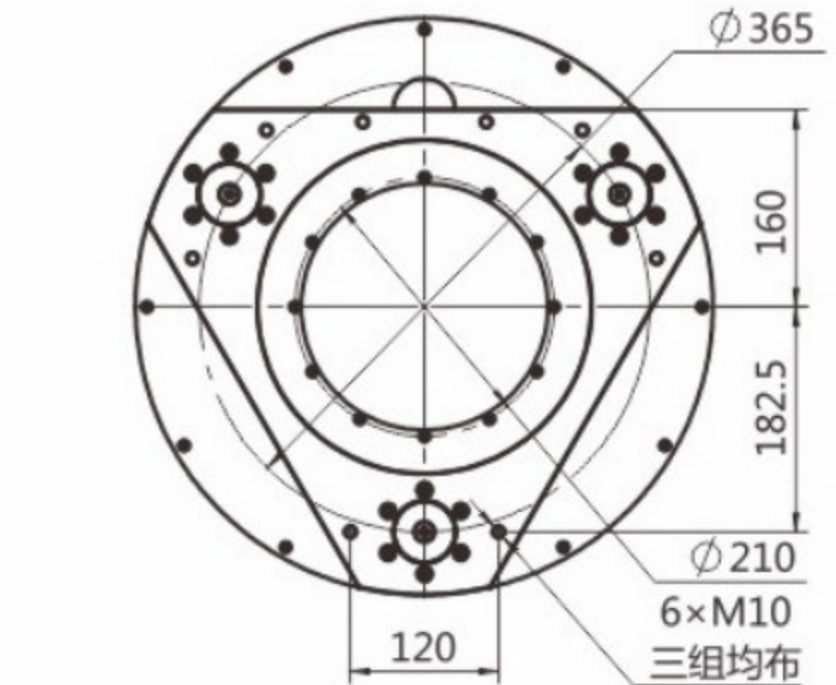

SJX 520 Serices

ZL-SJX-520-750-48-50-1500

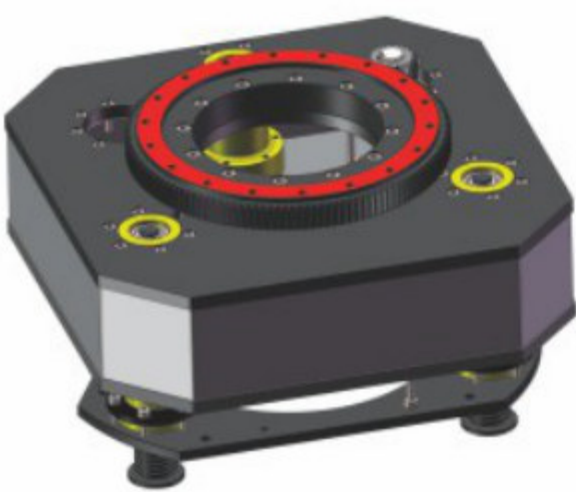

升降参数
Lift parameter

类型 Type	X	行星减速机 Planetary reducer	
行程 Route	mm	50	
丝杆规格 Screw rod specification	mm	T45×6	
减速机速比 Speed ratio of reducer	i	30	
传动齿比 Gear ratio	I	1.65	
升降速度 Up and down speed	mm/s	10	
升降时间 Up and down time	s	5	
限位传感器 Limit Sensor	SICK	常开NPN-24V Regular opening NPN-24V	

电机参数
Motor parameters

负载 Load	Kg	1500	2000
电机功率 Motor power	W	750	1200
电机电压 Motor voltage	V	48	48
电机转速 Motor speed	Rpm	3000	3000
电机电流 Motor current	A	19.9	32
额定扭矩 Rated Torque	N·m	2.39	4
防护等级 Protection level	IP	65	65

旋转参数
Rotation parameter

类型 Type	X	行星减速机 Planetary reducer	
减速机速比 Speed ratio of reducer	i	30	
传动齿比 Gear ratio	i	6.75	
旋转位移 Rotation Displacement	90/转90/rpm	1.69	
旋转90° Rotate 90°	s	1.01	
旋转原点 Origin of rotation	SICK	常开NPN-24V Regular opening NPN-24V	

其它
Others

减速机润滑 Reducer lubrication	润滑脂 Grease	-20° ~ 200°
自重 Self weight	Kg	约 88.8

